

Ledex® Rotary Solenoids Size 7S Precision Standard Coil

Performance Specifications

Stroke	Holding Torque ² (mNm)	Starting Torque (mNm) ¹ @ 20°C Maximum Duty Cycle				
		100%	50%	25%	10%	5%
25°	2260.0	1243.0	2689.4	3751.6	4791.2	5265.8
35°	*	678.0	1356.0	2486.0	4294.0	4746.0
45°	1469.0	565.0	994.4	1853.2	3367.4	3706.4
55°	*	*	*	*	*	*
67½°	*	282.5	576.3	1107.4	1977.5	2180.9
95°	678.0	169.5	395.5	723.2	1186.5	1310.8

All data is at 20°C coil temperature. Force (torque) outputs degrade with elevated temperatures.

¹ Gross starting torques are shown. For net available starting torque, subtract return spring torque of 84.8 mNm. ±20%.

² Holding torque is shown at the stabilised temperature of 105°C and continuous duty.

* Consult factory.

How to Order


- Using the Performance Chart to the left, select one of the five columns which provides the appropriate duty cycle for your application. Reading down this column locate the torque for the stroke you need. For net available starting torque, subtract return spring torque of 84.8 mNm ±20% (if torque is insufficient go to next larger solenoid size).
- Use the chart below to select the model number corresponding to your desired design, stroke and direction of rotation (as viewed from armature end, opposite mounting studs).
- Using the Specification Chart to the right, select the same duty cycle column. Follow down the column into the VDC ratings. Select the voltage which most closely matches your supply voltage. Read across to the left to select the coil awg suffix.
- Replace the last two digits of the model number (XX) with the coil awg number to complete the part number.

Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our distributors.


All catalogue products manufactured after April 1, 2006 are RoHS Compliant

ROTARY Solenoids


- Armature cover
- Armature end shaft
- Return spring



- Armature cover
- Base end shaft
- Return spring



- Armature cover
- Double shaft
- Return spring



Stroke/ Direction*	Nom. Axial Stroke	Standard		Long Life		Standard		Long Life	
		Standard	Long Life	Standard	Long Life	Standard	Long Life		
25° CW	1.9 mm	M-3057-0XX	E-3057-0XX	M-2477-0XX	E-2477-0XX	M-2309-0XX	E-2309-0XX	M-15009-0XX	E-15009-0XX
25° CCW	1.9 mm	M-1354-0XX	E-1354-0XX	M-2592-0XX	E-2592-0XX	M-3406-0XX	E-3406-0XX	M-15103-0XX	E-15103-0XX
35° CW	2.0 mm	M-15076-0XX	E-15076-0XX	M-2355-0XX	E-2355-0XX	M-1428-0XX	E-1428-0XX	M-15054-0XX	E-15054-0XX
35° CCW	2.0 mm	M-15485-0XX	E-15485-0XX	M-2323-0XX	E-2323-0XX	M-15488-0XX	—	—	—
45° CW	2.0 mm	M-1355-0XX	E-1355-0XX	M-3070-0XX	E-3070-0XX	—	—	—	—
45° CCW	2.0 mm	M-1356-0XX	E-1356-0XX	M-3148-0XX	E-3148-0XX	—	—	—	—
55° CW	2.0 mm	M-15486-0XX	—	M-15487-0XX	—	—	—	—	—
67½° CW	2.0 mm	M-2809-0XX	—	M-2400-0XX	—	M-1480-0XX	—	—	—
67½° CCW	2.0 mm	M-15061-0XX	—	M-2303-0XX	—	M-1484-0XX	—	—	—
95° CW	2.2 mm	M-1178-0XX	—	M-3069-0XX	—	M-1334-0XX	—	—	—
95° CCW	2.2 mm	M-1357-0XX	—	M-2858-0XX	—	M-15121-0XX	—	—	—

* Direction of rotation (cw – clockwise or ccw – counterclockwise) is viewed from the armature end of the solenoid opposite the mounting studs.

Note: The XX in the part number suffix must be filled in with the awg of your choice.

Ledex® Rotary Solenoids Size 7S Precision Standard Coil

Coil Specifications

Maximum Duty Cycle	100%	50%	25%	10%	5%
Maximum ON Time (sec) when pulsed continuously ¹	∞	80	38	16	5.7
Maximum ON Time (sec) for single pulse ²	∞	138	50	18	6.4
Watts (@ 20°C)	35	70	140	350	700
Ampere Turns (@ 20°C)	1570	2230	3150	5000	7034

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
23	8.09	780	16.3	23.0	33.0	52.0	73.0
24	12.34	949	21.0	29.0	41.0	65.0	92.0
25	18.62	1148	26.0	37.0	52.0	83.0	116.0
26	30.84	1472	33.0	47.0	66.0	105.0	147.0
27	48.77	1854	41.0	59.0	83.0	132.0	185.0
28	81.14	2436	52.0	74.0	105.0	167.0	234.0
29	121.0	2944	65.0	92.0	130.0	206.0	290.0
30	190.0	3650	82.0	116.0	164.0	261.0	367.0
31	275.0	4175	103.0	147.0	208.0	329.0	463.0
32	440.0	5292	130.0	169.0	239.0	380.0	—
33	715.0	6650	158.0	223.0	316.0	—	—


General Specifications

Dielectric Strength	23-29 awg, 1200 VRMS; 30-33 awg, 1500 VRMS
Recommended Minimum Heat Sink	Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminium plate measuring 384.5 mm square by 3.2 mm thick.
Coil Resistance	23-30 awg, ±5% tolerance; 31-33 awg, ±10% tolerance
Starting Torque	Gross torque values are shown. For net starting torque, subtract return spring torque
Return Spring Torque	84.8 mNm ±20%
Weight	1.020 kgs
Dimensions	See page D36


- ¹ Continuously pulsed at stated watts and duty cycle.
- ² Single pulse at stated watts (with coil at ambient room temperature 20°C).
- ³ Other coil awg sizes available, consult factory.
- ⁴ Reference number of turns.

All specifications subject to change without notice.


- No shafts
- 3 tapped holes
- Return spring




- Armature end shaft
- 3 tapped holes
- Return spring



- Base end shaft
- 3 tapped holes
- Return spring



- Double shaft
- 3 tapped holes
- Return spring




Standard	Long Life	Standard	Long Life	Standard	Long Life	Standard	Long Life
M-1352-0XX	E-1352-0XX	M-15491-0XX	E-15491-0XX	M-2490-0XX	E-2490-0XX	M-2415-0XX	E-2415-0XX
M-2590-0XX	E-2590-0XX	M-1197-0XX	E-1197-0XX	M-3362-0XX	E-3362-0XX	M-15116-0XX	E-15116-0XX
M-2388-0XX	E-2388-0XX	M-15492-0XX	E-15492-0XX	M-15498-0XX	E-15498-0XX	M-15134-0XX	E-15134-0XX
M-15616-0XX	E-15616-0XX	M-15493-0XX	E-15493-0XX	M-1467-0XX	E-1467-0XX	M-15137-0XX	E-15137-0XX
M-2950-0XX	E-2950-0XX	M-3007-0XX	E-3007-0XX	M-1312-0XX	E-1312-0XX	M-15502-0XX	E-15502-0XX
M-3096-0XX	E-3096-0XX	M-15014-0XX	E-15014-0XX	M-1317-0XX	E-1317-0XX	M-15503-0XX	E-15503-0XX
M-15490-0XX	—	M-15494-0XX	—	M-15499-0XX	—	M-15614-0XX	—
M-3350-0XX	—	M-15495-0XX	—	M-15500-0XX	—	M-15504-0XX	—
M-15158-0XX	—	M-15496-0XX	—	M-15501-0XX	—	M-15505-0XX	—
M-1353-0XX	—	M-15104-0XX	—	M-2869-0XX	—	M-3037-0XX	—
M-3289-0XX	—	M-15497-0XX	—	M-1316-0XX	—	M-15506-0XX	—


Ledex[®] Rotary Solenoids 7S Dimensions

mm


Armature Cover Configuration — Armature End Shaft

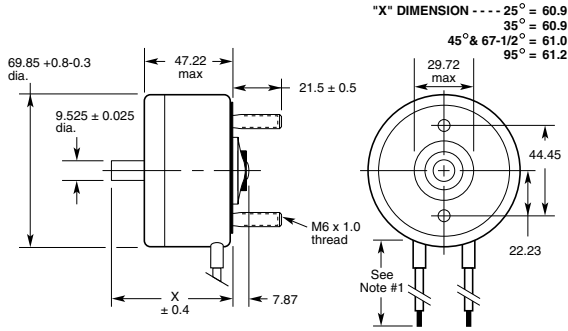

Armature Cover Configuration — Base End Shaft

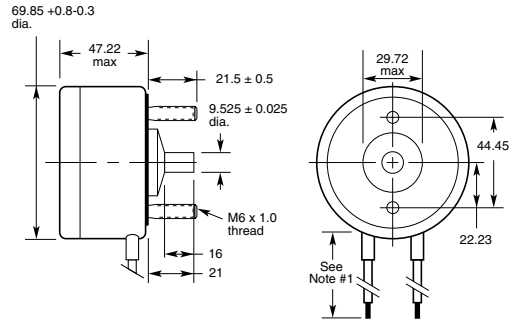

Armature Cover Configuration — Double Shaft

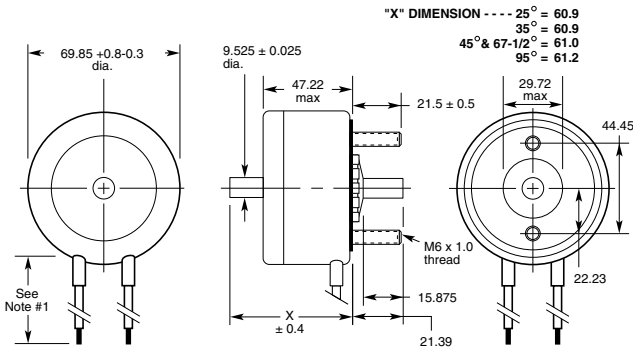


Notes:

- 1) All configurations have 250 mm minimum leads, 24 awg, PVC insulation.
- 2) For electrical specs and performance charts, see pages D26-D27.

All specifications subject to change without notice.


No Shaft

3 holes equally spaced located 1/2 rotary stroke $\pm 3^\circ$ to left of centre for R.H. stroke, right of centre for L.H. stroke. M5 x 0.8 thread

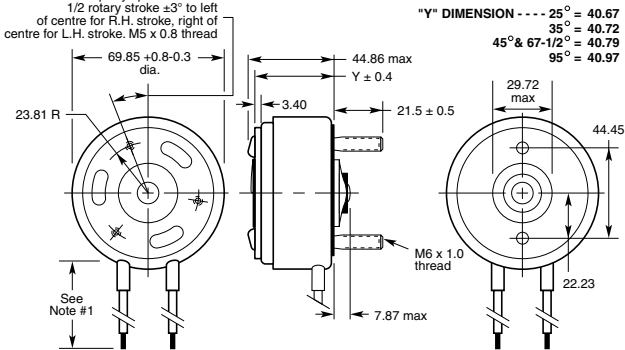


Base End Shaft

3 holes equally spaced located 1/2 rotary stroke $\pm 3^\circ$ to left of centre for R.H. stroke, right of centre for L.H. stroke. M5 x 0.8 thread

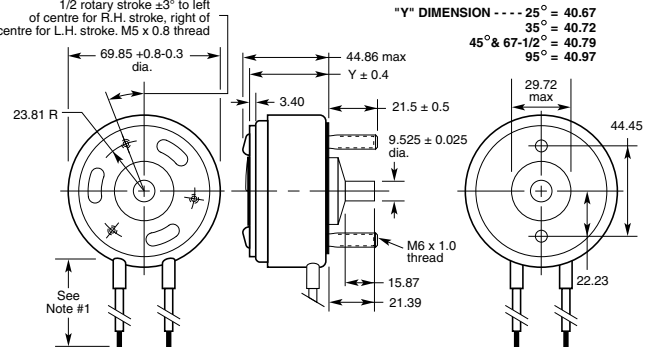

Armature End Shaft

3 holes equally spaced located 1/2 rotary stroke $\pm 3^\circ$ to left of centre for R.H. stroke, right of centre for L.H. stroke. M5 x 0.8 thread

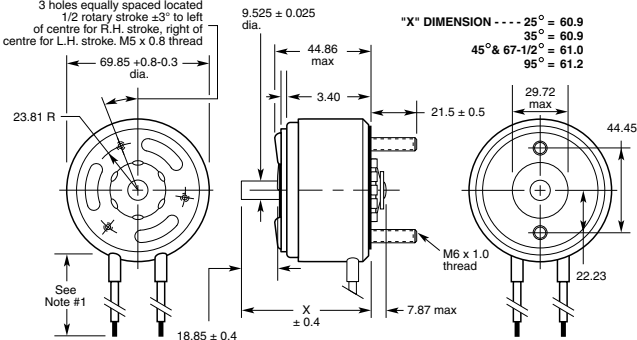

Double Shaft

3 holes equally spaced located 1/2 rotary stroke $\pm 3^\circ$ to left of centre for R.H. stroke, right of centre for L.H. stroke. M5 x 0.8 thread

