

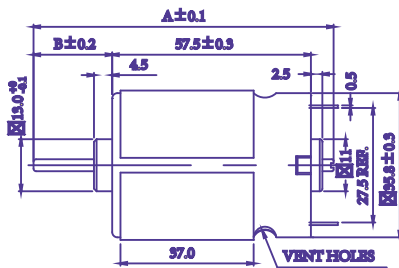


ZDRS-550PM-5935-f

Typical Applications:

- Precision Instruments
- Automatic Vending Machines
- Household Appliances
- Tooth Brushes
- Office Automation Equipments
- Electronic Typewriter

DIRECTION OF ROTATION



NOTES:

- LENGTH OF SHAFT DIM "A" IS 66.0mm
- FRONT EXTENSION DIM "B" IS: mm 29.5
MEASURED WITH SHAFT PUSHED TO PLASTIC END CAP
- BACK PLAY mm Max.
- DIRECTION OF ROTATION: ANTI-CLOCKWISE
WHEN VIEWING MOTOR OUTPUT END WITH POSITIVE VOLTAGE APPLIED TO POSITIVE TERMINAL

TEST CONDITION:

- RATED VOLTAGE : VDC 18
- OPERATING TEMPERATURE RANGE: °C — °C 60

AT NO LOAD:


- CURRENT : A 1
- SPEED : rpm 20000±10%

AT MAXIMUM EFFICIENCY:

- CURRENT : A 6.43
- OUTPUT : W 81
- SPEED : rpm 17300
- TORQUE : g.cm 460
- EFFICIENCY: % 70.6

AT STALL:

- CURRENT : A 41.4
- TORQUE : g.cm 424

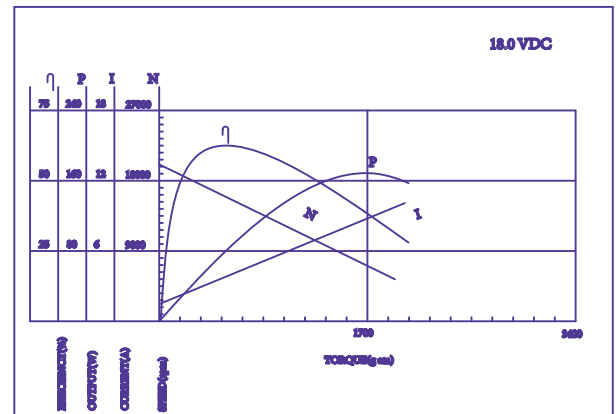

CUSTOMER NO.	5100926-05	DRAW BY	CHECKED BY	T.Z	APPROVED BY	DATE
--------------	------------	---------	------------	-----	-------------	------